

Portable Digital Signage

JP-WCM Series is a kind of portable lcd poster display, an interactive and upgrade of the more traditional led board and lighting box. The display is much more clearer and smarter. It can play videos and automatically update the menus and prices of new products, and increase the service efficiency and appeal.








Size:43inch,49inch,55inchOS:Android 11Color:Black or WhiteRam:2GResolution:4k optionRom:16GLow radiation and protection against blue light, better rotection of your visual health.Industrial grade LCD panel support 7/24 hours runningNetwork: LAN & WIFI, optional 3G or 4GOptional PC configuration: 13/15/17 CPU +4G/8G/16G rotect releaseContent release step: upload material; make contents; content management; content release



	Model	JP-WCM430	JP-WCM490	JP-WCM550
Panel	LCD Size	43 inch	49 inch	55 inch
	Resolution	1920*1080		
	Display Area(H x V)mm	942.2*530.4	1073.8*604	1211.4*682.2
	Aspect Ratio	16:9		
	Brightness (cd/m2)	300		
	Colour	16.7M(8-bit)		
	Viewing Angle	178°		
	Contrast Ratio	1200:1		
	LED Type	E-LED		
	Protective Glass	3mm		
	Lifespan	60000Hours		
Audio	Speaker Type	Stereo 2×5W 8Ω		
AV I/O	Video	HDMI*1		
	Audio	Audio Socket(3.5mm)*1		
Power	Power supply	AC110~240V (50Hz~60Hz)		
	Power consumption	45W	48W	51W
Mechanical	Unit Size (W*H*D mm)	1750*592.8*48	1804*669*49.3	1900*747.1*47.9
	Package Size (W*H*D mm)	1845*165*700	1915*165*790	2015*165*860
	Net Weight (KG)	41	47	54
	Gross Weight (KG)	42	48	55
Environmental	Operating Temperature	0°C~55℃		
	Storage Temperature	-5°C~60°C		
	Operating Humidity	10%RH~90%RH		
	Storage Humidity	10%RH~90%RH		
Operation	CPU	Quad Core Cortex-A55 1.8GHz		
System	GPU	ARM G52		
	RAM	2G(4G option)		
	ROM	16GB(8GB,32GB,64GB option)		
	USB	USB2.0 HOST (x2) ,TF (x1)		
	LAN	10/100M Ethernet (Network Version Only)		
	WIFI	802.11b/g/n/ac (Network Version Only)		
	SIM Slot	3G/4G(Option)		
	OS	Android11		
Accessories	Include	Scheduling Software, Remote Control, Key, Power Cord,WIFI Stick,User Manual		
Warranty	Warranty period	1year(Default),2 or 3years Option		
	Technical support	Lifetime		

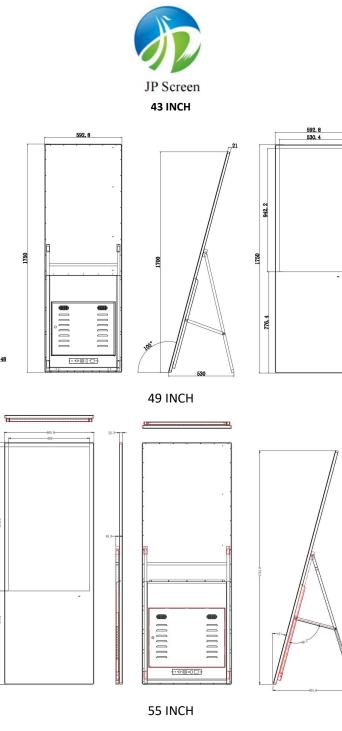

A

21

H

